

# MISCELLANEOUS

## CABINET/CLOSET HARDWARE


### CAL-ROYAL

#### CR-DIFP218

US3, 5, 15, 15A, 26, 26D  
Drive in  
Finger Pull  
2-1/8" Dia.  
No nails



### DON-JO



#### DJ-1590

Finishes: 605, 625  
Material: Cast.

### IVES

4 per bag.  
Sold by the bag

#### Finger Pull

- Ideal for use on sliding doors.
- Easy installation.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: Inside Cup Diameter: 3/4"; Overall Diameter: 1"; Depth: 5/16"



**Stock No. (Specify Finish)**

**IV-218BB**

Finishes: 3, 15, 15A, 26

#### Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Extra deep recess and reverse tapered grip provide for ease of pulling and gripping.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 1-5/16" H x 3-1/8" W x 7/16" D.

### IVES



**Stock No. (Specify Finish)**

**IV-22B**

Finishes: 3, 10B, 15, 15A, 26, 26D

#### Flush Pull

- Ideal for use on sliding doors.
- Built-in prong design eliminates the need for screws or brads and facilitates installation.
- Packed with two escutcheon pins for added holding power.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: Inside Cup Diameter: 2-1/8"; Overall Diameter: 2-7/16"; Depth: 7/16"

### IVES



**Stock No. (Specify Finish)**

**IV-221B**

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

#### Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Reverse tapered grip provide for ease of pulling.
- Made from cast brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B12201 and A156.14 D1781.
- Dimensions: 3-1/8" H x 1-5/8" W x 7/16" D.

### IVES




**Stock No. (Specify Finish)**

**IV-222B**

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

# MISCELLANEOUS

## CABINET/CLOSET HARDWARE



**Stock No. (Specify Finish)**  
**IV-223B**

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

### Flush Pull

- Low profile makes this pull ideal for louvered, bi-folding or wardrobe doors.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 3-9/16" H x 1-5/16" W x 1/2" D

**Stock No. (Specify Finish)**  
**IV-227B**

Finishes: 3, 5, 10B, 15, 15A, 26, 26D

### Flush Pull

- Contoured for ease of pulling.
- Extra deep well.
- Deluxe quality.
- Made from wrought brass.
- Conforms to design requirements of ANSI/BHMA A156.9 B22201 and A156.14 D2781.
- Dimensions: 3-5/8" H x 1-3/4" W x 9/16" D

### Elbow Catch

- Ideal for use on the inactive leaf of a pair of cabinet doors.
- Surface applied, making installation simple.
- Made from cast brass or cast aluminum.
- Conforms to design requirements of ANSI/BHMA A156.9.
- Dimensions:  
Plate: 1-3/8" x 5/8"  
Strike: 13/16" x 5/8"



**Stock No. (Specify Finish)**

**IV-2A** Aluminum

Finishes: 3, 10, 14, 92

**IV-2MB** Brass

Finishes: 3

### Round Knob

- Two diameters stocked: 1" and 1-1/4".
- Made from wrought brass.
- Furnished with a No. 8-32 machine screw, 1-1/8" long.
- Conforms to ANSI/BHMA A156.9 B22131.
- | Model & Diameter | Projection |
|------------------|------------|
| 521 1"           | 15/16"     |
| 521 1 1/4"       | 1-1/8"     |





**Stock No. (Specify Finish)**

**IV-521B \* 1"** 1" Diameter

**IV-521B \* 1-1/4"** 1-1/4" Diameter

\*Finishes: 3, 5, 10B, 15, 15A, 26, 26D

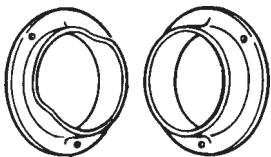

**Stock No. (Specify Finish)**

**IV-585F3**

Finishes: 3

### Closet Pole Sockets

- Flange design prevents accidental knock out of pole.
- Made from wrought steel.
- Accommodates pole or pipe with outside diameter of 1-3/8".
- Packed in pairs.

**Stock No. (Specify Finish)**

**IV-586P**

Finishes: White Plastic

### Closet Pole Sockets

- Made from a heavy duty plastic for long life and extra strength.
- Single screw mounting.
- Accommodates pole or pipe with outside diameter of 1-3/8".

©ZIPF LOCK COMPANY


See page 427 for Cal Royal, Don Jo, Ives finish descriptions.

**431**  
**(PL-42)**

# MISCELLANEOUS

## POCKET DOOR LOCKS & PULLS

## CAL-ROYAL

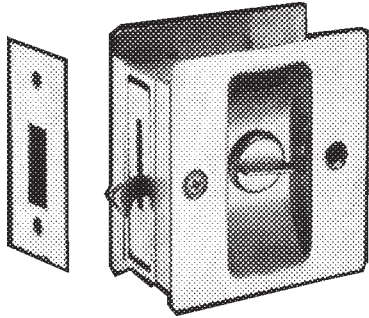




### For Pocket Doors

- \*Adjustable for 1-3/8" to 1-3/4" door thickness.
- Fully reversible.
- Simple to install.
- Individually polybagged & boxed.
- \*Privacy for 1-3/4" requires Rocker Pin-SPECIFY

Stock No.	Description
SDL-16-	Privacy Lock
SDL-17-	Passage Lock

•Privacy has emergency release.

FINISH:	US3(605)	Description
	5(609)	Bright Brass
	15(619)	Antique Brass
	15A(620)	Satin Nickel
	26(625)	Antique Nickel
	26D(626)	Bright Chrome
		Satin Chrome



### Stock No. (Specify Finish)

**IV-990B**

Finishes: 3, 5, 26, 613, 619, 620

### Sliding Door Pull - Passage

- Fits doors 1-3/8" to 1-1/2".
- Decorative coined edges.
- Pre-assembled for doors opening left to right. Plates are reversible.
- Body and strike made from solid brass.
- Dimensions: 1-3/4" deep x 2-1/4" high

### Stock No. (Specify Finish)

**IV-991B**

Finishes: 3, 5, 26, 613, 619, 620

### Sliding Door Lock - Privacy

- Fits doors 1-3/8" to 1-1/2".
- Decorative coined edges.
- Pre-assembled for doors opening left to right. Plates are reversible.
- Body, turn knob and strike made from solid brass.
- Dimensions: 1-3/4" deep x 2-1/4" high


### Stock No. (Specify Finish)

**IV-992B**

Finishes: 3

### Sliding Door Lock - Double Sided

- Fits doors 1-3/8" to 1-1/2".
- Decorative coined edges.
- Pre-assembled for doors opening left to right. Plates are reversible.
- Body, turn knobs and strike made from solid brass.
- Dimensions: 1-3/4" deep x 2-1/4" high

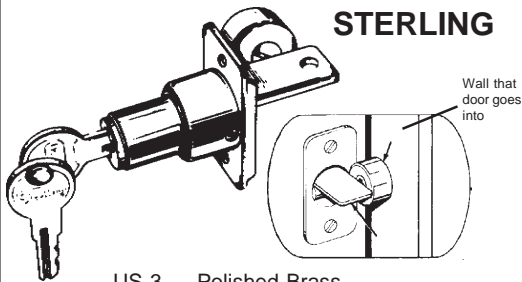


US-3 Polished Brass  
US-26D Satin Chrome

**Stock No**    **Finishes**    **Keying**  
**ST-1062**    **US-3 or 26D**    **KD or KD**

This sturdy lock provides a simple low-cost means of locking pocket doors. May be installed in almost any pocket door. All exterior surfaces are plated for good appearance. Quick and easy to install. No Mortising. Fits doors 1-3/8" to 1-3/4" thick. Jamb strike furnished. Two keys.

## CAL-ROYAL



**CR-EP23**

US3  
Edge Pull, Flush  
Mount, Size 3"

## DON-JO



### Edge Pull

**DJ-104**

Finishes: 605, 613, 626  
Material: Solid Brass.  
Dimensions: 3-7/8" x 3/4"

©ZIPF LOCK COMPANY

# MISCELLANEOUS

## POCKET DOOR LOCKS & PULLS



### Sliding Door Edge Pull

- 3/4" width allows installation on narrow as well as standard doors.
- Spring automatically returns lever flush with plate.
- Made from solid brass.
- Conforms to design requirements of ANSI/BHMA A156.14 D2801.
- Dimensions: 3-7/8" H x 3/4" W

**Stock No. (Specify Finish)**

**IV-230B**

**Finishes:** 3, 5, 10B, 15, 15A, 26, 26D



### Round Pocket Door Lock


- Fits standard 2-1/8" prep.
- Installs in minutes.
- Auto Catch Lock Mechanism.
- Lifetime Mechanical Warranty.
- 10-year Finish Warranty.

**Stock No. Description**

**KW-334** Passage

**KW-335** Privacy

**Specify Stock No. and Finish.**

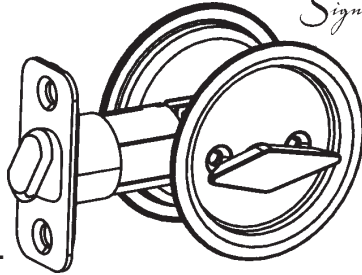

12 locks per case.

### SPECIFICATIONS

**DOOR THICK:** 1-3/8" to 1-3/4"

**BACKSET:** 2-3/8"

**BORE:** 2-1/8" x 1"

**FINISHES:** **US-3** (605) Polished Brass

**US-5** (609) Antique Brass

**US-10B** (613) Oil Rubbed Bronze

**US-15**(619) Satin Nickel

**US-15A** (620) Antique Nickel

**US-26D** (626) Satin Chrome


**US-32** (629) Bright Stainless Steel

## STORM DOOR LOCKS



### Storm Door Latch


- For wood storm doors 7/8" to 1-1/8" thick.
- Reversible: fits right or left hand, inswinging or outswinging doors.
- Security lock feature operates from inside rose.
- Solid brass safety strike assures latching and is designed to compensate for air pressure build-up between doors.
- Made from wrought brass.
- Dimensions:  
Backset: 1-3/4"  
Rose Diameter: 1-7/8"  
Knob Diameter: 1-3/4"  
Knob Projection: 2"  
Lever Length: 1-3/4"  
Lever Projection: 1-7/8"

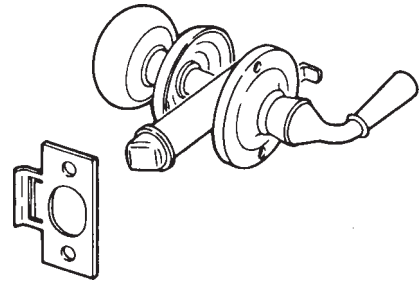

**Stock No. (Specify Finish)**

**IV-980B**


**Finishes:** 3, 5, 10B, 15, 15A, 26, 26D



### TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 3".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 1".

- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.



### TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 7/8".
- Installs with spring loaded strike plate.



©ZIPF LOCK COMPANY

See page 427 for Cal Royal, Don Jo, Ives finish descriptions.

**447**  
**(PL-42)**