



# MISCELLANEOUS

## Folding Door Lock




### ST-1064 US-3

Positive locking action. Easy to mount. Only one 3/4" hole needed in one door. Strike is mounted on back side of opposite panel or on striking jamb. Key may be removed in either locked or unlocked position. Two keys per lock. Fits doors from 3/4" to 1-3/8" thick.

## —STERLING—

## Sliding Door Lock

US-3 Polished Brass  
US-26D Satin Chrome

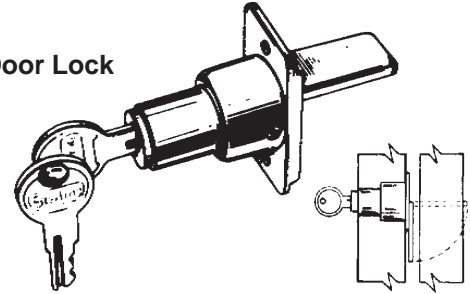

### ST-1068 US-3, 26D

A truly quality wardrobe lock. Patented, positive-action design with lock cylinder geared directly to the tongue. One half turn of key locks or unlocks. Fits doors 3/4" to 1-3/4" thick. Two keys per lock.

## CRASH STOP (CHAIN)

### CAL-ROYAL



#### CR-HDCDV48 26D

Adjustable Chain Door Stop (20" to 30-1/2")  
(Ives #115)




**Stock No.** IV-CS115-25 26D  
**Length** 25-1/2"  
Finishes: 26D

#### Extra Heavy Duty Crash Stop

- Specially designed for full-size exterior doors.
- Tear resistant, grey vinyl cover.
- Heavy duty compression spring assembled to both ends of chain and end brackets.
- Packed with sheet metal screws.
- Cast Brass brackets with solid, welded steel chain.
- Meets ANSI/BHMA A156.16, L12231, (Grade 1).
- Length: 25-1/2"; For 36" wide doors;  
Bracket size: 1-9/16" X 1-9/16"

## DOOR BOLTS

### CAL-ROYAL




Stock No.	Length	Finish
CR-SB873	3" Bolt	US-3, 15, 15A, 26
CR-SB874	4" Bolt	US-3, 5, 10B, 15, 15A, 26
CR-SB876	6" Bolt	US-3, 5, 10B, 15, 15A, 26
CR-SB8712	12" Bolt	US-3, 5, 10B, 15, 15A, 26

Brass Surface Bolt  
(Poly Packed w/screws)


#### CR-ESSBUL-50

US26D  
UL Listed 8" Heavy  
Duty Surface Bolt.  
(Ives #453)  
Bolt Throw: 1-3/16"  
Width: 1"  
Projection: 1-5/8"

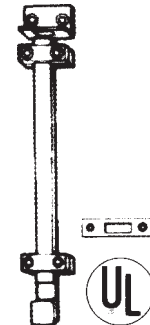

## COMBI-BOLT

10,000  
Possible  
Combinations

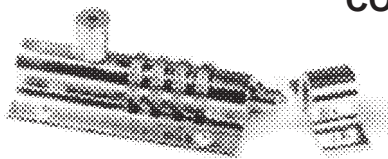


**Stock No.**  
**CB-2000 BLACK**  
Black finish

- Great for gates and sheds.
- 10,000 possible combinations.
- Easily set your combination anytime.
- Permanent screw mounts.
- Heavy duty solid metal bolt & construction.
- Functionality/simplicity of sliding bolt while providing additional security.
- Ideal for outdoor use, totally rustproof.
- Easy to install in variety of applications.
- Easily converts from right hand to left hand doors.


©ZIPF LOCK COMPANY

# MISCELLANEOUS

## DOOR BOLTS

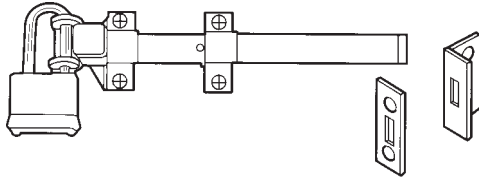

# DON-JO

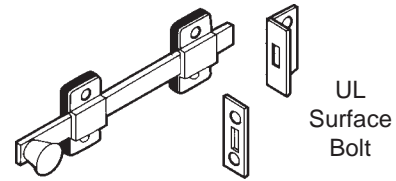


UL  
Surface  
Bolt

Stock No.	Finish	Size	Throw
DJ-1582	630	8"	1"

- All stainless steel construction.
- Padlock not included.


Stock No.	Finish	Size	ANSI
DJ-1580	626	8"	L84161

- Furnished with Rim and Mortise strikes.

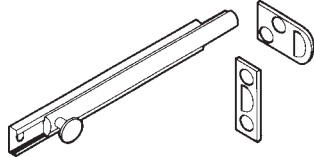

Stock No.	Finish	Size	ANSI
DJ-SB-4	605, 613, 619, 620, 625, 626	4"	L04151
DJ-SB-6	605, 613, 619, 620, 625, 626	6"	L04151


- Furnished with Rim and Mortise strikes.
- 619, 620 finishes are discontinued, Call for closeout prices.



**Locking Mortise Bolt**  
5051-04-51x  
Satin Brass

### Decorative Surface Bolts

- Concealed screw design enhances appearance and security.
- Exceptional strength and durability provided by interlocking construction of heavy gauge track and rod.
- Permanent stop prevents rod disengagement from track.
- Tension spring holds bolt in desired position.
- Track assures smooth operation and interlocks with side edges of rod to eliminate marring.
- Decorative 5/8" diameter knob designed to facilitate bolt operation.
- Made from extruded brass.
- Available in 4" and 6" lengths.
- Packed with both Universal and Mortise Strikes.
- Meets design requirements of ANSI/BHMA A156.16.
- Dimensions: Throw: 7/16"; Projection: 3/4" Width: 11/16"

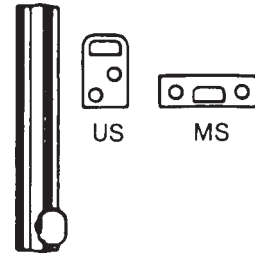


### Stock No. (Specify Finish & Length)

**IV-40B \* 4"** 4" length  
\*Finishes: 3, 5, 10B, 15, 15A, 26, 26D  
**IV-40B \* 6"** 6" length  
\*Finishes: 3, 5, 10B, 15, 15A, 26, 26D

### Decorative Surface Bolts

- Features attractive 3/8" half-round rods and well-proportioned guides.
- Semi-concealed guides assure smooth operation and are positioned under the rod to eliminate marring the surface of the bolt.
- Stainless steel tension spring prevents rod disengagement from guide and provides permanent spring tension to hold bolt in desired position.
- Decorative 1/2" diameter knob designed to facilitate bolt operation.
- Made from solid brass or burnished steel.
- Available in 3", 4" and 6" lengths.
- Packed with both Universal and Angle Strikes.
- Meets design requirements of ANSI/BHMA A156.16.
- Dimensions: Throw: 3/4"; Projection: 3/4"; Half Round Rod: 3/8" Overall Width: 1-3/16".

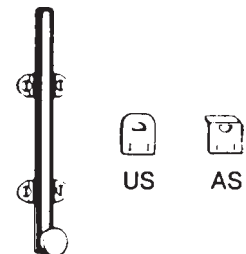

### Stock No. (Specify Finish & Length)

**IV-043B** 4" or 6" length - Brass  
Finishes: 3, 10B, 15, 15A, 26, 26D  
**IV-043F** 3", 4", 6" length - Steel  
Finishes: 3

©ZIPF LOCK COMPANY

See page 427 for Cal Royal, Don Jo, Ives finish descriptions.


433 v1  
(PL-42)

# MISCELLANEOUS

## DOOR BOLTS

### Decorative Surface Bolts


- Features attractive 1/2" half-round rods and well-proportioned guides.
- Semi-concealed guides assure smooth operation and are positioned under the rod to eliminate marring the surface of the bolt.
- Stainless steel tension spring prevents rod disengagement from guide and provides tension to hold bolt in desired position.
- Decorative **3/4" diameter knob** designed to facilitate bolt operation.
- Made from burnished steel.
- Available in 6" length.
- Packed with both Universal and Angle Strikes.
- Meets design requirements of ANSI/BHMA A156.16.
- Dimensions: Throw: 1"; Projection: 15/16"; Half Round Rod: 1/2"; Overall Width: 1-3/8".

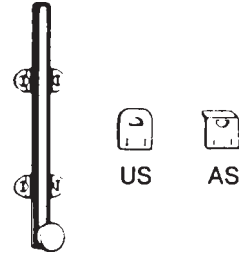

**Stock No. (Specify Finish & Length)**  
**IV-43F3 6"** 6" length - Steel  
**Finishes: 3**

### Dutch Door Bolts


- Practical, rugged, attractive bolt for application on dutch doors as well as other areas.
- Chamfered rod end draws the two leaves of door tightly together.
- Sufficient tolerance provided in strike opening to allow for misalignment of door leaves and also prevents binding of bolt.
- Decorative 1" diameter knob designed to facilitate bolt operation.
- Made from solid brass.
- Packed with Standard Strike.
- Dimensions: Throw: 5/8"; Projection: 1-1/8"; Half Round Rod: 5/8"; Overall Width: 1-5/8"; Rod Length: 4-1/4"; Overall Length, including knob: 4-3/8"

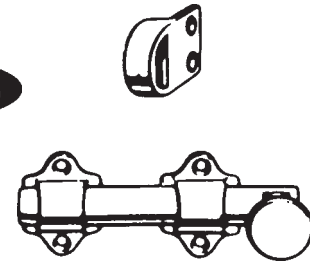

**Stock No. (Specify Finish & Length)**  
**IV-054MB** 6" length - Steel  
**Finishes: 3, 26D**

### Surface Bolt

- Surface Bolt has 1-3/16" throw for maximum security.
- Strong tension springs prevent creep.
- Ideal for all types of doors.
- Available 12" length. (8", 18" and 24" by special order)
- Unit packed with standard screws for added security.
- Unit packed with both a universal top strike (T) and a mortise bottom strike (B).
- Constructed of heavy duty steel.
- 8" and 12" Bolts are UL listed up to 3 hours when used on the inactive door of a pair up to 10' in height.
- Meets ANSI/BHMA A156.16 L84161
- Dimensions: Bar: 3/4" Wide x 1/4" Thick; Overall Width: 2-1/32"; Overall Projection: 1-5/16"  
 Top Strike: 1-1/2" x 1-1/2" Angle, 3/16" Thick; Bottom Strike: 3-1/2" Long x 1-5/8" Wide x 1/8" Thick.

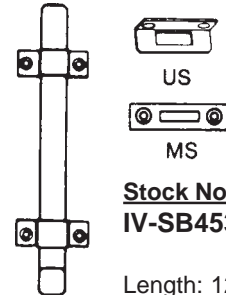

**Stock No.**  
**IV-SB453-12-TB 26D**

Length: 12"  
**Finishes: 26D**

## Master Lock

### DUAL FUNCTION DOOR SECURITY BAR

Adjusts to fit most Sliding and Hinged doors

Non-marring yoke (removable for sliding doors)  
 Designed to fit most doors, simple push button adjustment.  
 High strength steel tube. 20-gauge.  
 Portable. Collapsible, to fit most suitcases and garment bags.  
 Pivoting ball joint for full contact on floor.  
 Padded foot provides sure grip on most floors.  
 Lifetime Guarantee.

**Stock No.**  
**265D (White)**

For Sliding Doors

For Hinged Doors

© ZIPP LOCK COMPANY

## DOOR CHAINS

### CAL-ROYAL

**CR-DG22**

US3 Solid Brass  
 Chain Door Guard  
 6-3/4" Chain




## DOOR GUARDS

### CAL-ROYAL

**CR-BBDHG88**

US3, 26D  
 Zinc Diecast Swing Bar  
 Door Guard with  
 ball bearing  
**Limited supply of US-5.**  
**Call for closeout price.**



### FLIP LOCK MAG-8705

For in-opening doors. Left or right hand.  
 Heavy gauge steel.



# MISCELLANEOUS

## HOOKS — COAT, HAT, ETC.

### Coat & Hat Hook

- Especially designed to accommodate large hats.
- Made from cast aluminum.
- Conforms to ANSI/BHMA A156.16 L33121.
- Dimensions:  
Base: 2-1/4" H x 1-3/8" W  
Projection: 3-5/8"  
Overall Height: 5-3/4"



**Stock No. (Specify Finish)**  
**IV-575A3**  
Finishes: 3

### Ceiling Hook

- Ideal for use in closets, attached to underside of shelves, or in storage lockers.
- Made from cast aluminum.
- Dimensions:  
Base: 1" H x 1-7/8" W  
Projection: 2-1/4"



**Stock No. (Specify Finish)**  
**IV-580A**  
Finishes: 3, 92

### Wardrobe Hook


- Compact hook is perfect where space is limited, such as behind doors where low profile is needed.
- Made from cast aluminum.
- Dimensions:  
Base: 1-1/4" H x 1-1/4" W  
Projection: 1-5/8"



**Stock No. (Specify Finish)**  
**IV-581A**  
Finishes: 3, 92

### Double Wardrobe Hook

- Compact double hook is perfect where space is limited, such as behind doors where low profile is needed.
- Made from cast brass or cast aluminum.
- Dimensions:  
Base, Brass: 1-1/8" H x 1-1/4" W  
Base, Aluminum: 1-1/16" H x 1-3/16 W  
Projection, Brass: 1"  
Projection, Aluminum: 1-3/32"




**Stock No. (Specify Finish)**  
**IV-582A** Cast Aluminum  
Finishes: 3, 92  
**IV-582MB** Cast Brass  
Finishes: 3, 5, 10B, 15, 15A, 26, 26D

## KEY BLOK FOR LEVERS

<u>Stock No</u>	<u>Description</u>
<b>A200 KD</b>	Keyed Different
<b>A200 KA</b>	Keyed Alike

### Portable! Light! Strong!

- Fits most lever handle locks.
- Prevents entry of any existing keys.
- Portable! Fits in the palm of your hand.
- Added protection! A new lock in just seconds.
- High strength aluminum alloy.
- **Silver Powdercoated Finish**

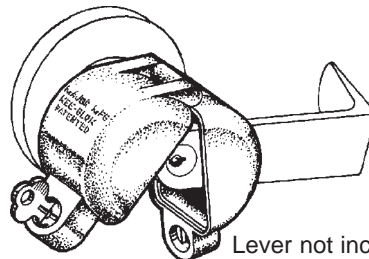

Lever not included

Blocks all existing keys to a lever handle in seconds!

**Major**  
MANUFACTURING, INC.

**FITS:** Schlage Rhodes, Schlage Oly, Arrow Sierra, Sargent 10 Line Series, Falcon DG, Lockwood Lever, U.S. Lock, Cal Royal Appolo, LSDA Lever, S Parker Hardware, Sargent 6500 Series Lever, AND MANY OTHER MODELS


©ZIPF LOCK COMPANY

# MISCELLANEOUS

## HOUSE NUMBERS

### Traditional House Numbers

- 4" High.
- Popular traditional styling for easy readability.
- Made from solid wrought brass.
- Conforms to ANSI/BHMA A156.16 L13181.
- Brass brads included.

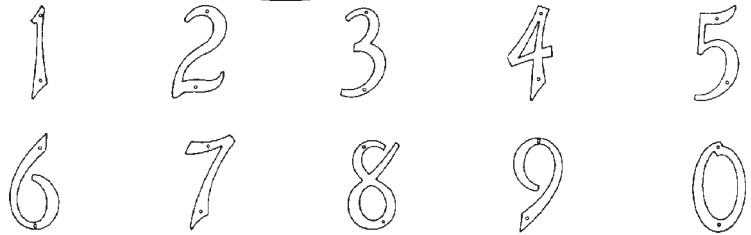

**To Order, Specify Stock# & Finish**


EX: IV-3004-619

Finishes: 605, 619, 620

Stock#	House Number	Stock#	House Number
IV-3004-	#0	IV-3054-	#5
IV-3014-	#1	IV-3064-	#6
IV-3024-	#2	IV-3074-	#7
IV-3034-	#3	IV-3084-	#8
IV-3044-	#4	IV-3094-	#9

### Contemporary House Numbers

- 5" High.
- Bold, thick design is easy to see from a distance.
- Made from cast brass.
- Mounting screws included.

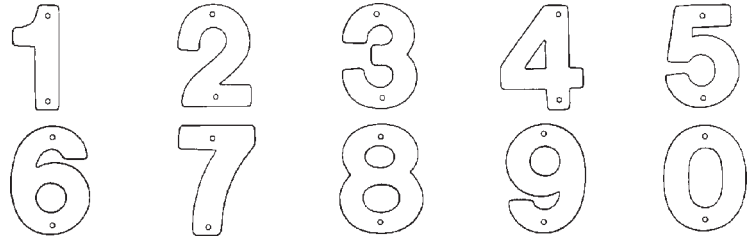

**To Order, Specify Stock# & Finish**

EX: IV-3005-619

Finishes: 505, 605, 613, 619, 620, 625

Stock#	House Number	Stock#	House Number
IV-3005-	#0	IV-3055-	#5
IV-3015-	#1	IV-3065-	#6
IV-3025-	#2	IV-3075-	#7
IV-3035-	#3	IV-3085-	#8
IV-3045-	#4	IV-3095-	#9

## KEY BLOKS



Stock No	Description
A100 KD	Keyed Different
A100 KA	Keyed Alike


- Prevents entry of any existing keys.
- Portable! Fits in the palm of your hand.
- Added protection! A new lock in just seconds.
- High strength aluminum alloy. Silver powdercoat finish.
- A100 fits 90% of all knob locks.

## LETTER BOX PLATES



### Sleeves for use with Letter Box Plates

- Made of stainless steel.
- For 1-3/4" hollow core doors.

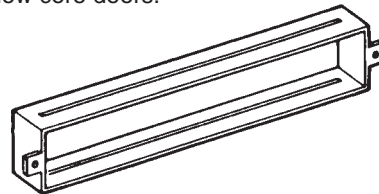

Stock No.	For Letter Box Plates:
IV-601 1-3/4	620, 621, 622 Plates
IV-602 1-3/4	618, 619, 623, 624 Plates

For use with Letter Box Plates on next page.

# MISCELLANEOUS

## POCKET DOOR LOCKS & PULLS



### Sliding Door Edge Pull

- 3/4" width allows installation on narrow as well as standard doors.
- Spring automatically returns lever flush with plate.
- Made from solid brass.
- Conforms to design requirements of ANSI/BHMA A156.14 D2801.
- Dimensions: 3-7/8" H x 3/4" W

**Stock No. (Specify Finish)**

**IV-230B**

**Finishes:** 3, 5, 10B, 15, 15A, 26, 26D



### Round Pocket Door Lock


- Fits standard 2-1/8" prep.
- Installs in minutes.
- Auto Catch Lock Mechanism.
- Lifetime Mechanical Warranty.
- 10-year Finish Warranty.

**Stock No. Description**

**KW-334** Passage

**KW-335** Privacy

**Specify Stock No. and Finish.**

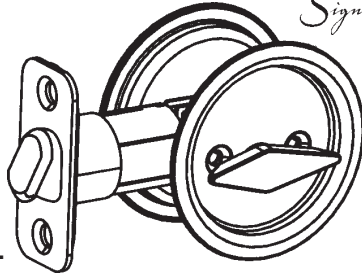

12 locks per case.

### SPECIFICATIONS

**DOOR THICK:** 1-3/8" to 1-3/4"

**BACKSET:** 2-3/8"

**BORE:** 2-1/8" x 1"

**FINISHES:** **US-3** (605) Polished Brass

**US-5** (609) Antique Brass

**US-10B** (613) Oil Rubbed Bronze

**US-15**(619) Satin Nickel

**US-15A** (620) Antique Nickel

**US-26D** (626) Satin Chrome


**US-32** (629) Bright Stainless Steel

## STORM DOOR LOCKS



### Storm Door Latch


- For wood storm doors 7/8" to 1-1/8" thick.
- Reversible: fits right or left hand, inswinging or outswinging doors.
- Security lock feature operates from inside rose.
- Solid brass safety strike assures latching and is designed to compensate for air pressure build-up between doors.
- Made from wrought brass.
- Dimensions:  
Backset: 1-3/4"  
Rose Diameter: 1-7/8"  
Knob Diameter: 1-3/4"  
Knob Projection: 2"  
Lever Length: 1-3/4"  
Lever Projection: 1-7/8"

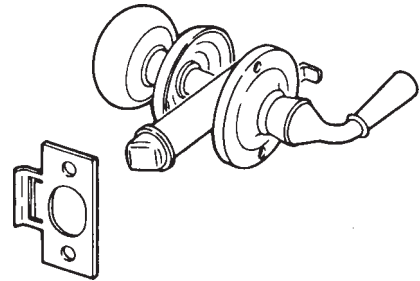

**Stock No. (Specify Finish)**

**IV-980B**


**Finishes:** 3, 5, 10B, 15, 15A, 26, 26D



### TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 3".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 1".

- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.



### TULIP KNOB LATCH

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-1/8" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Backset from jamb (door stop) 7/8".
- Installs with spring loaded strike plate.



©ZIPF LOCK COMPANY

See page 427 for Cal Royal, Don Jo, Ives finish descriptions.

**447**  
**(PL-42)**


# MISCELLANEOUS

## STORM DOOR LOCKS

### TULIP KEY-IN-KNOB LOCK

- For outswinging wood or metal doors.
- Fits doors 7/8" to 1-3/8" thick.
- Installation hole spacing 3".
- Installs in three 1/2" holes.
- Backset from jamb (door stop) 1".
- Installs with spring loaded strike plate.
- Covers most previous installation drillings in door.
- Key lock for extra security.

*Wright*  
PRODUCTS

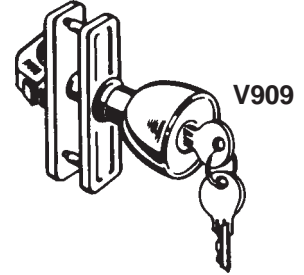


V909

### PUSH BUTTON LATCH

- For outswinging wood or metal doors.
- Fits doors 1" to 1-1/4" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Contains two sizes of strikes and shims to provide adjustment for latching.
- Has "No-Lock-Out" feature.

*Wright*  
PRODUCTS

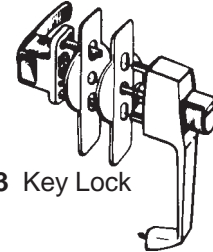


V333  
VK333-3 Key Lock

### COLONIAL PUSH BUTTON LOCK

- Authentic colonial hammered finish.
- For outswinging wood or metal doors.
- Fits doors 1" to 1-1/4" thick.
- Installation hole spacing 1-3/4".
- Installs in three 1/4" holes.
- Contains two sizes of strikes and shims to provide adjustment for latching.
- Has "No-Lock-Out" feature.
- Key lock for extra security.


*Wright*  
PRODUCTS



VCK333-3BL

### PUSH-PULL LATCH

- For wood or metal doors.
- Fits outswinging doors 7/8" to 1-3/8" thick.
- Installs with 1" diameter hole-no mortising.
- Backset 13/16" from jamb (door stop).
- Pull to open from outside, push to open from inside.



*Wright*  
PRODUCTS

V1000

## STORM DOOR CLOSERS

*Wright*  
PRODUCTS




V1020 Aluminum Finish  
V1020BL Black Finish

### PNEUMATIC DOOR CLOSER

- For outswinging wood or metal doors.
- Full 90° opening.
- Two hole end plug for summer or winter adjustable latching power.
- Adjustable closing speed.
- Factory lubricated.
- Internal spring for prevention of rod bending.
- Replacement cover plate furnished to cover old door bracket installation holes.

## TRAILER LOCKS


Comp  
FORT

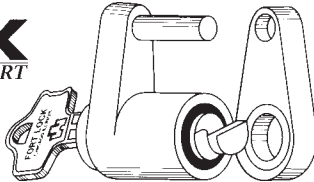

- TL-37 KD Key Different  
TL-37 KA 1339 Keyed Alike 1339
- 5000 series double bitting, 6 tumbler, key retaining in unlocked position, solid die cast construction. Key blank: K750. 90° key rotation

More on pages 473, 497-498.

*Wright*  
PRODUCTS

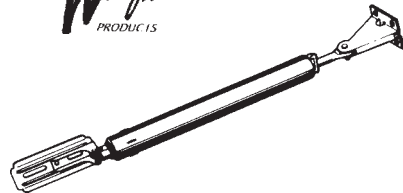

VH440BL

### HYDRAULIC DOOR CLOSER

- Hydraulic mechanism provides smooth constant "no bounce" action.
- For outswinging wood or metal doors.
- Full 90° opening.
- Two hole end plug for summer or winter adjustable latching power.
- Adjustable closing speed by rotating the tube.
- Factory lubricated.
- Aluminum tube assembly.
- Replacement cover plate furnished to cover old door bracket installation holes.
- Black Finish

©ZIPF LOCK COMPANY


# MISCELLANEOUS

## WINDOW HARDWARE



### Window Lock

- Spring actuated lever provides positive direct pull which pulls rails together.
- Stops rattles and drafts.
- When unlocking, lever automatically returns to opened position.
- Made from wrought steel.
- Meets design requirements of ANSI/BHMA 156.16.
- Dimensions: Base: 1-3/8" x 2-5/16"; Strike: 9/16" x 2-1/4"

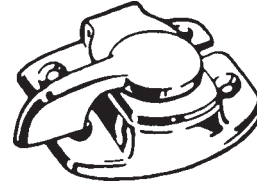


**Stock No. (Specify Finish)**

**IV-4F3**

Finishes: 3

### Window Lock

- Designed low to the sash for superior strength and greater resistance to breakage.
- Vertical and horizontal camming action for snug, non-rattling fit.
- Heavy gauge springs provide long-wearing action.
- Made from solid brass or aluminum.
- Meets design requirements of ANSI/BHMA 156.16.
- Dimensions:  
Base: 15/16" x 2-9/16"  
Strike: 5/8" x 2-9/16"



**Stock No. (Specify Finish)**

**IV-07A3** Aluminum

Finishes: 3

**IV-07MB** Solid Brass

Finishes: 3, 10B, 15, 15A, 26

### Bar Window Lift

- Facilitates opening of window in a safe manner.
- Can also be used as a drawer or utility pull.
- Made from solid brass or aluminum.
- Meets ANSI/BHMA A156.16.
- Dimensions:  
Base: 1-1/8" x 4"  
Projection: 1-1/16"



**Stock No. (Specify Finish)**

**IV-026A3** Aluminum

Finishes: 3

**IV-026MB** Solid Brass

Finishes: 3, 14

### Casement Fastener (2 sizes)

- For use on windows to provide weather-tight fastening and security.
- Also ideal for securing louvered doors and small doors.
- Made from solid brass or aluminum.
- Meets ANSI/BHMA A156.16.
- Dimensions:

#### IV-066


Base: 1-5/8" x 7/8"

Projection: 1-3/8"

#### IV-66

Base: 2-1/16" x 1-1/16"

Projection: 1-7/8"



**Stock No. (w/rim & mortise strikes)**

**IV-66A3 RS MS** Aluminum

Finishes: 3

**Stock No. (w/mortise strike)**

**IV-66B \* MS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/rim strike)**


**IV-66B \* RS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/surface strike)**

**IV-66B \* SS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D



**Stock No. (w/rim & mortise strikes)**

**IV-066A3 RS MS** Aluminum

Finishes: 3

**Stock No. (w/mortise strike)**

**IV-066B \* MS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/rim strike)**


**IV-066B \* RS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D

**Stock No. (w/surface strike)**

**IV-066B \* SS** Solid Brass

Finishes: 3, 10B, 15, 15A, 26, 26D



# MISCELLANEOUS

## WINDOW HARDWARE



### Casement Adjuster

- Securely holds casement window in any position.
- Can also be used to hold cabinet lids and drafting table tops in various positions.
- Made from burnished steel or solid brass.
- Available in 10" and 12" lengths.
- Dimensions: Tube: 3/8" x 5/8"; Projection: 1"  
Sash Plate: Brass: 1-5/8" x 5/8"; Steel: 2 x 5/8"  
Sill Plate: 2-1/4" x 15/16"




### Stock No. (Specify Finish & Length)

<b>IV-71B3 10"</b>	Length 10" - Brass
<b>IV-71B3 12"</b>	Length 12" - Brass
<b>Finishes: 3</b>	
<b>IV-71F3 10"</b>	Length 10" - Steel
<b>IV-71F3 12"</b>	Length 12" - Steel
<b>Finishes: 3</b>	



### Transom Catch

- Independent latch action; transom can be closed by pushing directly on ring.
- Reversible: latch bolt can be easily reversed by removing back plate.
- Narrow base accommodates 1-1/4" rail.
- Made from cast aluminum.
- Conforms to design requirements of ANSI/BHMA A156.16.
- Dimensions:  
Size: 2-1/4" x 1-1/4"  
Latch Throw: 5/16"




### Stock No. (Specify Finish)

<b>IV-80A4 US</b>	Universal Strike
<b>Finishes: 4</b>	

### Transom Chain

- Available in 10", 12" (15" special order) chain lengths to meet varying opening requirements and transom sizes.
- Made from wrought steel.
- Plate Size: 1-1/2" x 1".

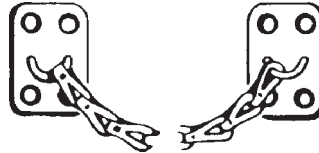

### Stock No. (\*Specify Finish & Length)

<b>IV-82F * 10"</b>	Length 10"
<b>*Finishes: 3, 14</b>	
<b>IV-82F * 12"</b>	Length 12"
<b>*Finishes: 3, 14</b>	




### HEAVY DUTY

For door or window. 2 per card.  
**MAG-8732 Aluminum**



### HEAVY DUTY

Fits wide or narrow tracks. No-Mar, 2 per card.  
**MAG-8746 Aluminum**



### KEYED WOOD SASH WINDOW LOCK

**MAG-8758 KA Brass**

For double hung wood windows