


EXIT DEVICES

VON DUPRIN

22 SERIES TOUCH BAR EXIT DEVICE

UL Listed
ANSI A156.3, 1994, Type 1, Grade 1

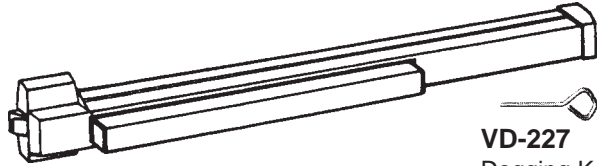

VD-227
Dogging Key
Size: 5/32"


Stock No.	Description
VD-22EO 3'	EXIT ONLY (2'6" to 3' wide doors)
VD-22EO 4'	EXIT ONLY (3'1" to 4' wide doors)

FINISHES: **SP28** Sprayed Aluminum
SP313 Sprayed Dark Bronze (duranodic color)

TRIMS — (Optional)

Rim Cylinder
Not Included

Mortise Cylinder
Not Included



VD-210K
Key unlocks knob.
3" x 4-25/32"



VD-230NL
Key retracts
latch bolt
3" x 12-1/16"



VD-230TP
Key unlocks
thumbpiece.
3" x 12-1/16"

VD-210NL
Pull with cylinder
Key retracts
latchbolt
5-3/4" x 4-25/32"



VD-230L
Key unlocks
lever
3" x 6-3/8"



DESCRIPTION —

22 rim device for all types of single and double doors with mullion, UL Listed for accident hazard installations. Covers most stock hollow metal doors with 161 cutouts. Fits 1-3/4" or 2-1/4" doors.

FEATURES: •Non-handed •Field sizeable •3/4" throw latch bolt •Latch bolt deadlocking •Hex key dogging.

DIMENSIONS: •Touch bar height to finished floor—39-13/16" at center •Touch bar projection, neutral—3-3/4", depressed—3" •Center case—4-3/16" x 2-3/8" x 2-3/4" •Minimum door stile: 3-13/16".

STRIKE: Device is furnished standard with 299 strike in dull black finish.

FINISHES: **SP28** Sprayed Aluminum
SP313 Sprayed Dark Bronze (duranodic color)

22 SERIES EXIT ALARM KIT

\$-Discontinued, Call for
closeout price.



Stock No.	Description
\$VD-22ALK	EXIT ALARM KIT
FINISHES: SP28	Sprayed Aluminum
SP313	Sprayed Dark Bronze (duranodic color)

DESCRIPTION —

The VD-22ALK battery alarm kit is a simple yet effective way to monitor the use of an exit device. While still a means of egress, the unit contains an internal horn. When the touch bar is depressed, the horn sounds to provide an audible means of signaling that the opening has been violated.

The key switch uses a standard 1-1/4" mortise cylinder. The unit operates on one standard 9-volt transistor battery. When the battery is weak the horn will emit an intermittent signal.

The alarm kit comes standard with the S1 switch that monitors the touchpad.

The VD-22ALK kit also includes "EMERGENCY EXIT ONLY, ALARM WILL SOUND" decal for application on door.

Due to the special VD-22ALK dogging cover, the dogging feature and other electrical options are NOT available.

The VD-22ALK can be easily installed on existing VD-22 bars. The VD-22ALK simply replaces the existing dogging cover on the VD-22 bar.

22 SERIES SURFACE MOUNTED VERTICAL ROD

UL Listed
ANSI A156.3, 1994, Type 2, Grade 1

\$-Discontinued, Call for
closeout price.

Stock No.	Description
VD-2227EO 3'	EXIT ONLY (2'6" to 3' wide doors)
\$VD-2227EO 4'	EXIT ONLY (3'1" to 4' wide doors)
Uses same trims as 22 Series touch bar at left.	

DESCRIPTION —

2227 surface mounted vertical rod device for all types of single or double doors, UL Listed for accident hazard installations. Covers stock hollow metal doors with 161 cutouts and fits door stiles as narrow as 3-5/8". Fits 1-3/4" or 2-1/4" doors.

FEATURES: •Non-handed •Field sizeable •5/8" throw latch bolt •Latch bolt deadlocking •Hex key dogging.

DIMENSIONS: •Touch bar height to finished floor—39-13/16" at center •Touch bar projection, neutral—3-3/4", depressed—3" •Center case—4-3/16" x 2-3/8" x 2-3/4" •Top & bottom latch case—4-1/2" x 2-1/8" x 1-1/2" •Vertical Rods—1/2" square tubing. Max. door undercut: 1/4" •Minimum stile: 3-5/8".

STRIKE: Device is furnished standard with 248L-4, 304L and 299 strikes in dull black finish.

©ZIPF LOCK COMPANY

EXIT DEVICES

VON DUPRIN


33A SERIES TOUCH BAR EXIT DEVICE

For Narrow Stile Doors (Aluminum, etc)

UL Listed
ANSI A156.3, 2001, Grade1

\$-Discontinued, Call for closeout price.

Now with deadlocking latchbolt

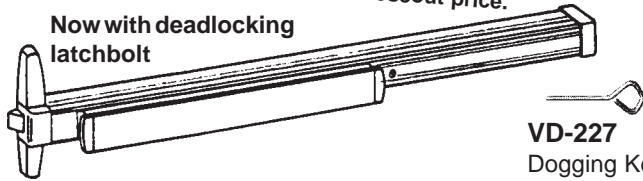

VD-227
Dogging Key
Size: 5/32"

Stock No.	Description
\$VD-33AEO 3' US28	EXIT ONLY (2'4" to 3' wide doors)

FINISHES: US-28 Anodized Aluminum

DESCRIPTION —

33A rim device for all types of single and double doors with mullions, UL Listed for Panic Exit Hardware. Device is non-handed, and fits doors with stiles as narrow as 1-3/4"


FEATURES: •Non-handed •Field sizeable •Deadlocking 3/4" throw latch bolt •Hex key dogging.

DIMENSIONS: •Touch bar height to finished floor—39-13/16" at center •Touch bar projection, neutral—3-13/16", depressed—3-1/16" •Center case—8-3/16" x 2-13/32" x 1-9/16" •Minimum door stile: 1-3/4".

STRIKE: Device is furnished standard with 1439 strike in dull black finish.

\$-Discontinued, Call for closeout price.

TRIMS — (Optional)



Rim Cylinder
Not Included

Stock No.
\$VD-336NL 26D

NL-Night latch. Key retracts latchbolt.


FINISHES: US-26D Dull Chrome

2670 EXIT ALARM LOCK

Secure, alarmed code-compliant protection for secondary exits

UL Listed
ANSI A156.3, Grade1
Panic Hardware (UL305)

Comples with NFPA 101®

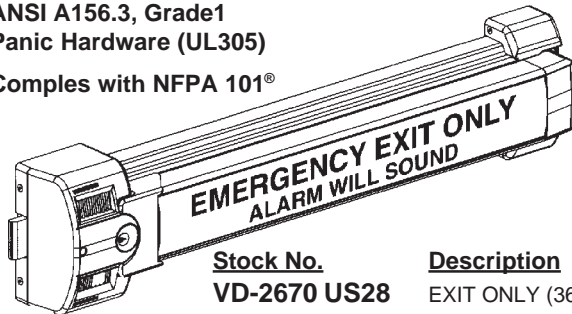

Rim cylinder not included. Order separately.

Stock No.	Description
VD-2670 US28	EXIT ONLY (36" to 48" door width range)

FINISHES: US-28 Anodized Aluminum

DESCRIPTION —

The 2670 Series exit alarm lock provides secure protection through a large stainless steel deadbolt, which is 2" x 1/2" and has over a 3/4" throw. The engagement area into the strike is over 1-1/4" square inches. The cast aluminum latch case protects the internal mechanism and resists tampering or vandalism from inside the door. This unit has been tested to withstand up to 1600 pounds of static load force against the door. The GUARD-X does not allow relatching or resetting the alarm after an unauthorized exit, other than by an authorized person with a key. A 100-decibel alarm provides a clear, attention-getting warning for an unauthorized exit or attempted exit. The armed indicator light informs the owner that the alarm is armed, and an audible low-battery alert signals the owner to replace the 9 volt battery when necessary.

OPERATION: GUARD-X is armed and disarmed by key, using a standard rim cylinder. It can be operated from the building exterior by a standard rim cylinder, so an authorized user can easily arm and disarm it to enter or exit the building when required. When using exterior operation a pull trim is recommended, see trims above. Rim cylinders must be ordered separately.

DIMENSIONS: •Touch bar height to finished floor—40" at center •Touch bar projection, neutral—4-1/8", depressed—2-3/4" •Latch case housing—7" x 4-1/16" x 4-1/8" •Device length: 32-1/2"


STRIKE: Device is furnished standard with 267 roller strike.

GUARD-X

TRIMS — (Optional)



VD-210DT
Dummy pull
5-3/4" x 4-25/32"
1-31/32" projection




VD-230DT
Dummy pull
3" x 12-1/16"
2" projection

EXIT DEVICES

VON DUPRIN

88 SERIES CROSS BAR EXIT DEVICE

UL Listed
ANSI A156.3, 1994, Grade1

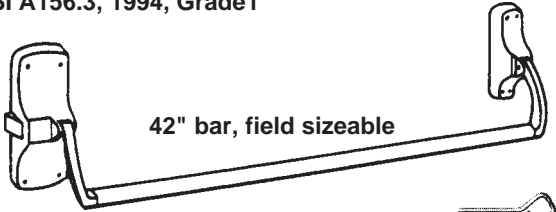

42" bar, field sizeable



VD-227
Dogging Key
Size: 5/32"


Stock No	Description
VD-88EO	EXIT ONLY (Nothing outside)
VD-88NL-R	NIGHT LATCH
\$VD-88TP	THUMB PIECE

FINISHES: **US-4** Dull Brass
US-26D Dull Chrome

*\$-Discontinued, Call for
closeout price.*

88 SERIES SURFACE MOUNTED VERTICAL ROD

UL Listed
ANSI A156.3, 1994, Grade1

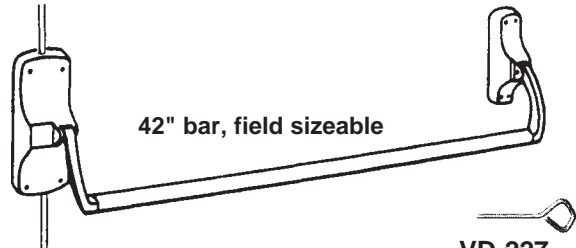

42" bar, field sizeable



VD-227
Dogging Key
Size: 5/32"

Stock No.	Description
VD-8827EO	EXIT ONLY (Nothing outside)
VD-8827TP 26D	THUMB PIECE

FINISHES: **US-4** Dull Brass
US-26D Dull Chrome

TRIMS —



NL-R
Key retracts
latch bolt

Rim Cylinder
Not Included
order separately



TP
Key locks
thumb piece

TRIMS —

Rim Cylinder
Not Included
order separately



TP
Key locks
thumb piece

DESCRIPTION —

88 cross bar device for all types of single and double doors with mullion, UL Listed for accident hazard installations. Covers stock hollow metal doors with 86 or 161* (*not applicable with all strike and mullion combinations, consult factory) cutouts. Fits 1-3/4" thick doors

FEATURES: •Fully reversible •Field sizeable •3/4" throw latch bolt •Hex key dogging.

DIMENSIONS: •Cross bar height to finished floor—36-13/16" at center •Cross bar projection, neutral—4-3/4", depressed—4" •Cross bar length—42" field sizeable •Lock stile case—8-1/4" x 2-3/4" x 15/16" •Hinge stile case—6" x 1-3/4" x 15/16" •Crossbar tubing—1".

STRIKE: Device is furnished standard with 299 strike in dull black finish.

FINISHES: **US-4** Dull Brass
US-26D Dull Chrome

DESCRIPTION —

8827 surface mounted vertical rod device is for all types of single and double doors, UL Listed for accident hazard installations. Covers stock hollow metal doors with 86 or 161 cutouts and fits door with stiles as narrow as 3-1/2". Fits 1-3/4" thick doors

FEATURES: •Fully reversible •Field sizeable •5/8" throw latch bolt •Hex key dogging.

DIMENSIONS: •Cross bar height to finished floor—36-13/16" •Cross bar projection, neutral—4-7/8", depressed—4" •Cross bar length—42" field sizeable •Lock stile case—8-1/4" x 2" x 15/16" •Hinge stile case—6" x 1-3/4" x 15/16" •Cross bar tubing—1" •Top and bottom latch cases—4" x 2" x 1-7/8" •Vertical rod—1/2" tubing •Up to 7" high doors.

STRIKE: Device is furnished standard with 299 (in dull black), 248L-4 and 304L.

FINISHES: **US-4** Dull Brass
US-26D Dull Chrome

©ZIPF LOCK COMPANY

EXIT DEVICES

VON DUPRIN

99 SERIES TOUCH BAR EXIT DEVICE

UL Listed
ANSI A156.3, 2001, Type 1, Grade 1



VD-227
Dogging Key
Size: 5/32"

Stock No. Description


VD-99EO 3' EXIT ONLY (2'4" to 3' wide doors) US-3, 4, 26D, 28.

VD-99EO 4' EXIT ONLY (2'10" to 4' wide doors) US-26D, 28.

FINISHES: \$US-3 Polished Brass **\$-Discontinued, Call for closeout price.**
 \$US-4 Satin Brass
 US-26D Satin Chrome
 US-28 Anodized Aluminum

99 SERIES SURFACE MOUNTED VERTICAL ROD

UL Listed
ANSI A156.3, 2001, Grade 1

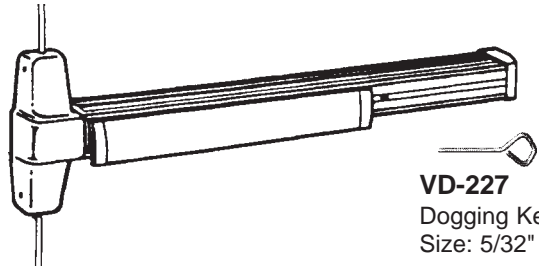

VD-227
Dogging Key
Size: 5/32"

Stock No Description

VD-9927EO 3' EXIT ONLY (2'4" to 3' wide doors)

FINISHES: US-3 Polished Brass
 US-26D Satin Chrome
 US-28 Anodized Aluminum

TRIMS FOR 99 AND 9927 — (Optional)



VD-990DT R/V/M
Pull when dogged.
3"x14-3/16"x3/32"

Rim Cylinder
Not Included



VD-990NL R/V
Key retracts
Latch bolt.
3"x14-3/16"x3/32"

Rim Cylinder
Not Included




VD-990TP R/V
Key locks/unlocks
thumbpiece.
2-3/4"x10-3/4"x27/32"

Rim Cylinder
Not Included



VD-992L R/V
Key locks lever
2-3/4"x10-3/4"x27/32"

**Specify Hand:
LHR or RHR**



VD-992L BE R/V
Blank escutcheon, lever
always operable.
2-3/4"x10-3/4"x27/32"

**Specify Hand:
LHR or RHR**

DESCRIPTION —

99 rim device for all types of single and double doors with mullion, UL Listed for Panic Exit Hardware. Covers stock hollow metal doors with 86 or 161 cutouts on single doors. Fits 1-3/4" and 2-1/4" thick doors

FEATURES: •Non-handed •Field sizeable •Deadlockin 3/4" throw latch bolt •Hex key dogging.

DIMENSIONS: •Touch bar height to finished floor—39-13/16" at center •Touch bar projection, neutral—3-13/16", depressed—3-1/16" •Center case—8" x 2-3/4" x 2-3/8".

STRIKE: Device is furnished standard with 299 strike in dull black finish.

DESCRIPTION —

9927 surface mounted vertical rod device for all types of single and double doors, UL Listed for Panic Exit Hardware. Covers stock hollow metal doors with 86 or 161 cutouts. Fits 1-3/4" & 2-1/4" thick doors

FEATURES: •Non-handed •Field sizeable •Deadlocking anti-friction top & bottom bolt, 5/8" throw •Hex key dogging.

DIMENSIONS: •Touch bar height to finished floor—39-5/8" at center •Touch bar projection, neutral—3-13/16", depressed—3-1/16" •Center case—8" x 2-3/4" x 2-3/8". Top and bottom latch case—4-1/2" x 2-1/8" x 1-1/2" •Vertical rods—1/2" square tubing •Up to 7' doors. Max undercut: 1/4".


STRIKE: Device is furnished standard with 299, 248L and 304L strikes.

Need a Von Duprin product not shown here?? Just give us a call — 1-800-848-1577


EXIT DEVICES

VON DUPRIN


SPECIFICATIONS FOR STRIKES FURNISHED IN EXIT DEVICES




248L-4
Projection: 3/8"




299
Projection: 13/16"




299F
Projection: 13/16"




499F
Projection: 15/16"



304L
Mortise: 13/16"



1439 Blade Stop
Projection: 1/2"



267
For Guard-X

EXIT DEVICE HANDING CHART

